


## TECHNICAL DATA SHEET

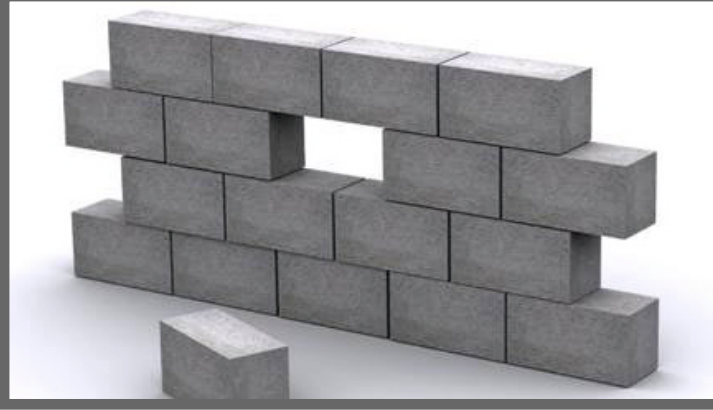

### **RITEBLOCK® PC**

High Performance Admixture for Concrete Block

(Ref. MBPL / TDS / RITEBLOCK PC / 0524)

#### ❖ **Product Description**

**RITEBLOCK® PC** is a ready to use , new generation plasticizer based on new polycarboxylate technology and specially designed to make unreinforced plain concrete block cost efficient. High performance compaction aid for semi-dry/no-slump concrete.

#### ❖ **Special Features**

- **ASTM C : 494 - TYPE - C & TYPE - E**
- High early strength super plasticizing admixture for concrete block.
- Eco-friendly product
- Increased green strength on immediate de-moulding
- Improved durability and life expectancy
- Improved surface finish



## ❖ Application

- Paver block.
- Solid concrete block.
- Concrete roof tile.
- Hollow concrete block.
- Light weight concrete block (CLC).
- Cement tiles (grey/ coloured)
- Kerbstones

## ❖ Advantages

- Increase plasticity
- Increase flexural strength & compressive strength  
Improves colors and texture consistency
- Reduced cracking & crazing
- Minimizes the undulation of the surface
- Sharper corner & edges

## ❖ Dosage

- Approximate dosage 200ml to 500ml per 50kg bag.
- Depending on site conditions dosages might vary.

## ❖ Packing

Available in **50 kg** & **250 kg** Drums.

## ❖ Shelf Life

Factory sealed pack are best before 12 months from the date of manufacturing in unopened condition and stored in cool & dry area.

## ❖ How to Apply

### Mixing

- The required quantity of RITEBLOCK PC should be mix with some amount of water and add it in concrete.

### Curing

- Normal curing is required.

## ❖ Notes on Application / Limitations

- Application can be done under normal temperature conditions.
- Provide the storage temperature 10°C to 30°C under cool and dry conditions.

## ❖ Technical Data

### General Properties

Testing Parameters	Results
Appearance	Light Amber Coloured Liquid
Specific Gravity	1.23+0.01
Solid Contain	42+2%
Solubility	Easily soluble with water

## ❖ Standard Followed

- **ASTM C : 494 - TYPE - C & TYPE - E**

## ❖ Precautions

- Keep out of reach of children
- Wear suitable protective cloths, respirator and gloves
- In case of contact with skin / eyes, wash immediately with plenty of water & seek medical help

Follow us on:



## Disclaimer



is a registered trademark of MYMIX BUILDPRO Private Limited.

The information given in this TDS is for general guidance only. Specific instruction for various site conditions can be provided on demand.

The product information & application details given by the company & its agents has been provided in good faith & meant to serve only as a general guideline during usage. Users are advised to carry out tests & take trails to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problems, qualities of other materials used and on site workmanship are factors beyond our control, there are no expressed or implied guarantee/warranty as to the results obtained. The company does not assume any liability or any consequential damage for unsatisfactory results, arising from the use of our products.